


## STC-0960.01

KNX Bus Power Supply with diagnostic function, 6 SU MDRC, 960 mA

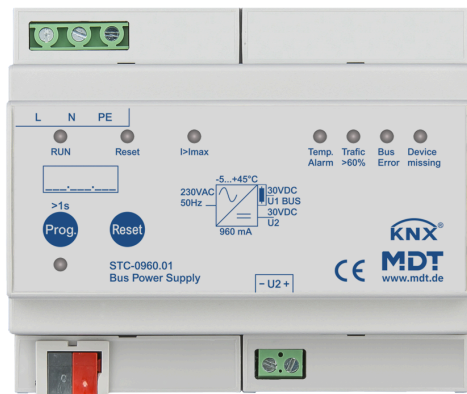

### Product description:

The overload-safe and short-circuit-proof MDT Bus Power Supply STC reliably supplies the bus devices of a KNX line with a stabilised DC voltage of 30 V. The diagnostic function of the bus coupler provides information about the bus voltage, the bus current, the utilisation of the power supply, in the case of a mains voltage failure and the failure of a monitored device. All events are saved with a time stamp. With additional unchoked output U2.

### Product functions:

- KNX Bus Power Supply with integrated choke
- Power supply 230 V AC
- Nominal current 960 mA, continuous current 1280 mA, peak current 1600 mA
- **Short circuit proof**
- **Overload protected**
- Additional unchoked output U2
- **Integrated Bus coupler with diagnostic functions:**
- Bus power, Bus current, Bus overload
- Mains power failure/recovery
- All events are stored in the ring storage with time a stamp
- Readout of the ring memory via a 14 Byte Telegram
- Safety function to detect a failed device in the KNX line

## Technical data:

<b>Device</b>	Device type	STC Bus Voltage Supply
	Article Number	STC-0960.01
	EAN / GTIN	4251916100018
	Installation width	6 SU / 108 mm
	Dimensions (H x W x D)	90 x 108 x 63 mm
	Weight, gross (incl. packaging)	0.41 kg
	Protection classification	IP20
	Installation type	MDRC, DIN rail 35 mm
	Overvoltage category	III
	Weight, net	0.376 kg
<b>Performance data</b>	Supply voltage U	230 V AC, 50 Hz
	Power dissipation device, typical (no-load)	≤ 1 W
	Efficiency at nominal load (before choke)	> 87 %
<b>Outputs</b>	Output voltage	30 V DC SELV *1
	Rated current	960 mA
	Continuous current	1280 mA
	Peak current	1600 mA
	Continuous total current, KNX + U2	1280 mA
	Parallel connection possible	No
<b>KNX</b>	KNX Medium	TP-256
	KNX Application	as of ETS 4
<b>Environmental conditions</b>	Ambient operating temperature	-5 ... +45 °C
	Storage	-20 ... +55 °C
	Humidity	< 95 %
<b>Connections</b>	Connection type	Screw terminal with slotted head
	Conductor cross section 1 x	0,5 ... 2,5 mm <sup>2</sup>
	KNX connection type	KNX terminal
	KNX cable cross section	0.6 ... 0.8 mm, solid conductor

\*1 Additional unchoked output U2

## Wiring diagram:

