

## SCN-KP360K301.03

KNX Combi-Presence Detector 360° with room climate sensors, Pure White matt finish



### Product description:

The MDT Combi-Presence Detector 360° is designed for ceiling installation in an installation box. Movements are detected in a diameter of up to 11 m, presence in a diameter of up to 5 m. The indoor environment is monitored with additional sensors for temperature, humidity, CO<sub>2</sub> and VOC mixed gas concentration. The quality of the air can be displayed directly on the presence detector using an air quality status indication light and RGB LEDs or output via objects.

### Product functions:

- Intelligent constant light control for up to 3 rows of luminaires
- **Sensors for CO<sub>2</sub> and VOC mixed gas concentration, relative humidity and temperature**
- Upper and lower threshold value selectable per measured value
- **Air quality visualisation via internal RGB LED**
- **Air quality status indication light for CO<sub>2</sub> or VOC concentration with 4 colour channels and adjustable output objects (1-bit / scenes / RGB / HSV)**
- 360° angle of detection, Range Ø 11 m, Presence Ø 5 m
- 1 HVAC- and 1 Alarm-/ message object
- **Selectable trigger- and presence sensitivity for day, night and Alarm**
- **Short-term presence to reduce the follow up time**
- Blocking- and forced operation with release time
- **Air quality control function selectable as step-/ PI-controller for CO<sub>2</sub>-/ or VOC-sensor**
- **Integrated room temperature controller with settable control parameters and externally adjustable setpoint value**

## Technical data:


<b>Device</b>	Device type	SCN Presence Detector
	Article Number	SCN-KP360K301.03
	EAN / GTIN	4251916113889
	Colour	Pure White, matt finish
	Diameter	100 mm
	Depth	44 mm
	Weight, gross (incl. packaging)	0.094 kg
	Protection classification	IP20
	Installation type	Flush mounted *1
	Included carrying ring	Carrying ring A
	Recommended installation height	2 ... 4 m
	Weight, net	0.054 kg
	<b>Operation</b>	Number of LEDs
<b>Inputs</b>	Number of sensors	3
	Dynamic range	5 ... 1000 Lux
	Range Ø	11 m <sup>*2</sup>
	Presence Ø	5 m
	Horizontal angle of coverage	360°
	Adjustable sensitivity	10 steps
	Measuring range for CO2 concentration	400 ... 5000 ppm <sup>*3</sup>
	Measuring range for VOC concentration	0 ... 500 IAQ (Index for air Quality)
	Measuring range for relative humidity	0 ... 95 % <sup>*4</sup>
<b>Outputs</b>	Constant light control	Yes, up to 3 light bands
	Number of integrated temperature controllers	1
	Room temperature control range	7 ... 35 °C
	Temperature range for messages	3 ... 45 °C
	Orientation light function	Yes
<b>KNX</b>	Nominal voltage KNX	30 V DC SELV
	Voltage range KNX	21 ... 31 V DC SELV
	Typical power consumption KNX bus	< 0,5 W
	KNX Medium	TP-256 with long frame support
	KNX Application	as of ETS 5 (latest)

## Technical data:


<b>Environmental conditions</b>	Ambient operating temperature	0 ... 40 °C
	Storage	-20 ... +55 °C
	Humidity	< 95 %
	Air humidity (permanent)	20 ... 80 %
	Air humidity (short-term)	0 ... 95 %
	Condensation permissible	No
<b>Connections</b>	KNX connection type	KNX terminal
	KNX cable cross section	0.6 ... 0.8 mm, solid conductor

- \*1 Ceiling installation in an installation box with the provided carrying ring.
- \*2 At the maximum mounting height of 4 m.
- \*3 Not suitable for safety-relevant gas measurements.
- \*4 Avoid condensation.

## Wiring diagram:

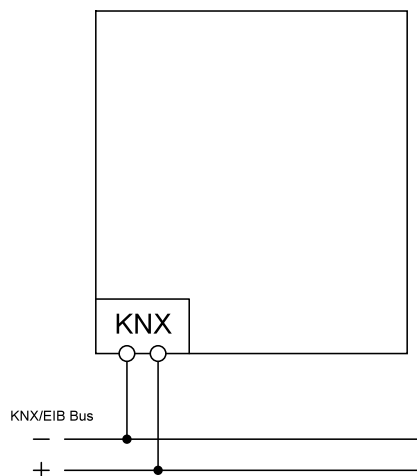

## Detection range and presence:

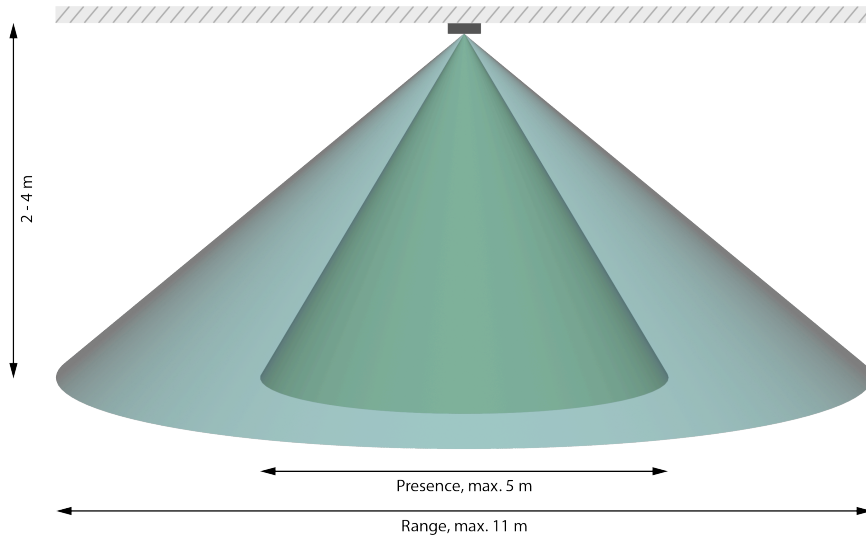

## Dimensional drawing:

