


## STV-0024.01

MDT Power Supply, 4 SU MDRC, 750mA, 24 V DC SELV

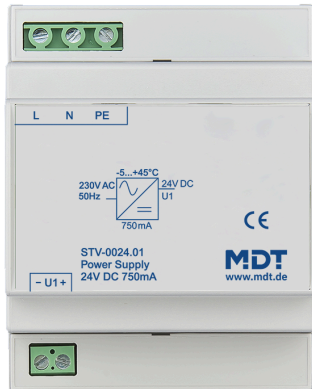

### Product description:

Universal 24 V DC power supply, e.g. for the MDT touch panel VisuControl, binary inputs, window contacts, etc.. Not suitable for use as KNX bus power supply.

### Product functions:

- SELV Power supply 24 V DC for **general purpose** use
- Power supply for 24 V Binary inputs, window contacts, etc.
- Suitable for VisuControl Touchpanel
- Power supply 230 V AC
- **Short circuit proof**

## Technical data:

<b>Device</b>	Device type	STV Power Supply
	Article Number	STV-0024.01
	EAN / GTIN	4251916100049
	Installation width	4 SU / 72 mm
	Dimensions (H x W x D)	90 x 72 x 65 mm
	Weight, gross (incl. packaging)	0.166 kg
	Protection classification	IP20
	Installation type	MDRC, DIN rail 35 mm
	Overvoltage category	III
	Weight, net	0.138 kg
<b>Performance data</b>	Supply voltage U	230 V AC, 50 Hz
<b>Outputs</b>	Output voltage	24 V DC SELV
	Rated current	750 mA
<b>Environmental conditions</b>	Ambient operating temperature	-5 ... +45 °C
	Storage	-20 ... +55 °C
	Humidity	< 95 %
<b>Connections</b>	Connection type	Screw terminal with slotted head
	Conductor cross section 1 x	0,5 ... 2,5 mm <sup>2</sup>
	KNX connection type	KNX terminal
	KNX cable cross section	0.6 ... 0.8 mm, solid conductor

## Wiring diagram:

